



Current Transformer Model 610 High Accuracy Split Core

Window Size 1.30" x 1.47"

REGULATORY AGENCY APPROVALS



E93779



LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1



APPLICATION:

For energy management systems and instrumentation equipment having a high input impedance, eg. 14K ohms minimum.

FREQUENCY:

50-400 Hz.

INSULATION LEVEL:

0.6 kV, BIL 10 kV full wave.

**CONTINUOUS THERMAL
CURRENT RATING FACTOR:**

330A at 30°C. amb.


250A at 55°C. amb.

Flexible leads are UL 1015, 105°C, CSA approved,
#18 AWG, 24" long unless otherwise specified.

Approximate weight 0.63 lbs.

5

TYPICAL PERFORMANCE CHARACTERISTICS
(WITH 1000 TURNS)

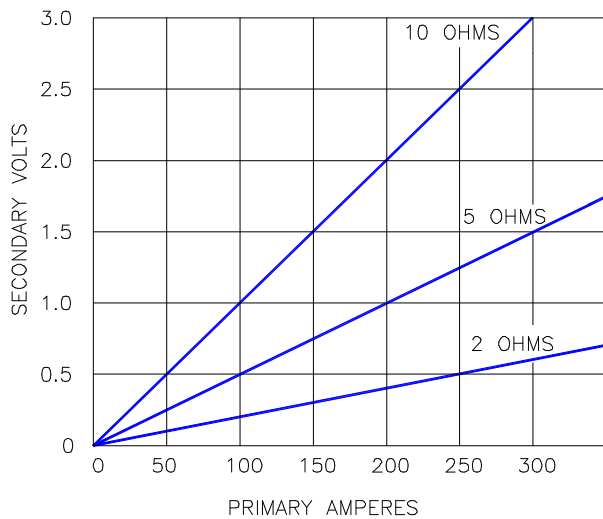

CATALOG NUMBER	CURRENT RATIO	BURDEN VA	ACCURACY AT 60 HZ
610-1000T	1000 TURNS	-	-
610-500T	500 TURNS	-	-

Model 610 High Accuracy Split Core

This transformer is designed for assembly to an existing electrical installation without the need for dismantling the primary bus or cables. It incorporates a snap fit between the fixed and removable sections.


This transformer is intended for use with high input impedance devices that require signal voltages up to 5 VAC.

The output can be rectified and filtered for devices requiring DC input. The non-linearity and voltage drop of the rectifiers and filters must be considered in the choice of the loading impedance.

Caution:

Proper safety precautions must be followed during installation by a trained electrician. Never install while bus is energized.

The current transformer must have its secondary terminals short circuited or the burden connected, before energizing the primary circuit.

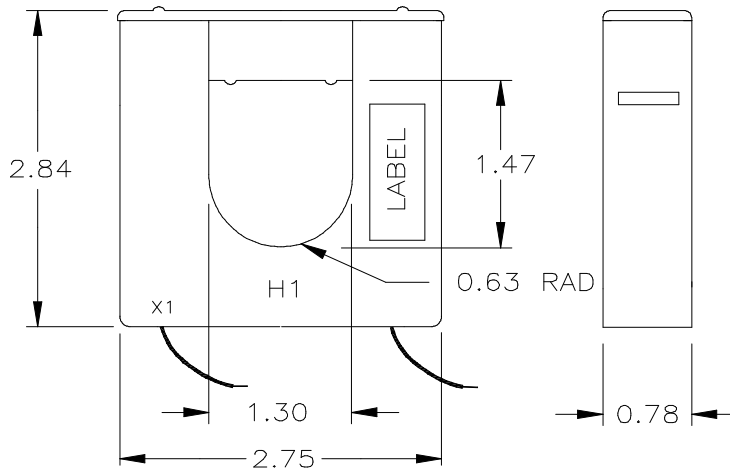

USA, Canada, Asia, Latin America

Tel: +1-800-547-8629

Fax: +1-905-201-2455

e-mail: sales.multilin@ge.com

Europe, Middle East, Africa

Tel: +34-94-485-88-00

Fax: +34-94-485-88-45

e-mail: gemultilin.euro@ge.com