



Models 296I, 297I, 298I, 299I, 300I

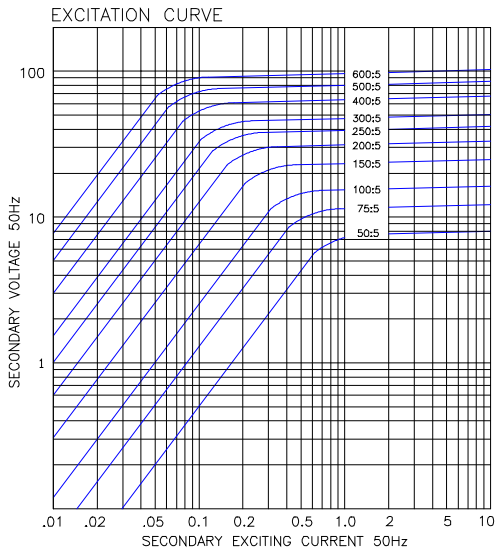

Model 297I Window Diameter 57.2mm
Approximate weight 6.8 kg

Catalog Number	Current Ratio	IEC 60044-1 Protection Class at 50 HZ					IEC 60044-1 Measuring Class at 50 HZ					Secondary Winding Resistance (ohms @ 75 °C)
		Burden VA					Burden VA					
		2.5	5.0	10.0	15.0	30.0	2.5	5.0	10.0	15.0	30.0	
297I - 500	50:5	10P5	-	-	-	-	3.0	5.0	-	-	-	0.026
297I - 750	75:5	10P10	10P5	-	-	-	3.0	3.0	5.0	5.0	-	0.038
297I - 101	100:5	5P15	10P10	10P5	-	-	1.0	3.0	3.0	5.0	-	0.051
297I - 151	150:5	5P20	5P15	10P10	10P5	-	1.0	1.0	3.0	3.0	5.0	0.077
297I - 201	200:5	5P20	5P15	5P10	5P5	10P5	0.5	0.5	1.0	1.0	3.0	0.103
297I - 251	250:5	5P20	5P15	5P10	5P10	5P5	0.5	0.5	0.5	1.0	1.0	0.128
297I - 301	300:5	5P30	5P20	5P15	5P10	5P5	0.2	0.5	0.5	0.5	1.0	0.154
297I - 401	400:5	5P30	5P25	5P20	5P15	5P5	0.2	0.2	0.5	0.5	0.5	0.205
297I - 501	500:5	5P30	5P30	5P20	5P15	5P10	0.2	0.2	0.2	0.2	0.5	0.257
297I - 601	600:5	5P30	5P30	5P25	5P20	5P10	0.2	0.2	0.2	0.2	0.5	0.308

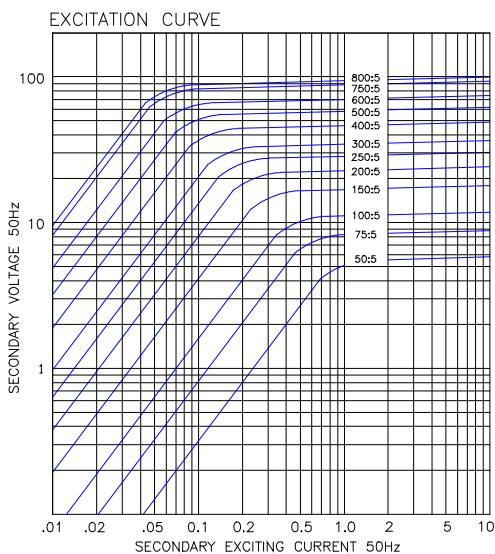

Model 298I Window Diameter 76.2mm
Approximate weight 5.4 kg

Catalog Number	Current Ratio	IEC 60044-1 Protection Class at 50 HZ					IEC 60044-1 Measuring Class at 50 HZ					Secondary Winding Resistance (ohms @ 75 °C)
		Burden VA					Burden VA					
		2.5	5.0	10.0	15.0	30.0	2.5	5.0	10.0	15.0	30.0	
298I - 500	50:5	10P5	-	-	-	-	3.0	-	-	-	-	0.014
298I - 750	75:5	10P5	-	-	-	-	3.0	5.0	-	-	-	0.035
298I - 101	100:5	5P10	10P5	-	-	-	1.0	3.0	5.0	-	-	0.037
298I - 151	150:5	5P15	5P10	10P5	-	-	0.5	1.0	3.0	5.0	-	0.060
298I - 201	200:5	5P15	5P10	5P5	10P5	-	0.5	0.5	1.0	3.0	5.0	0.080
298I - 251	250:5	5P20	5P15	5P5	5P5	-	0.5	0.5	1.0	1.0	3.0	0.100
298I - 301	300:5	5P20	5P15	5P10	5P5	-	0.5	0.5	1.0	1.0	3.0	0.140
298I - 401	400:5	5P25	5P20	5P15	5P10	5P5	0.2	0.5	0.5	0.5	1.0	0.186
298I - 501	500:5	5P25	5P20	5P15	5P10	5P5	0.2	0.2	0.5	0.5	0.5	0.233
298I - 601	600:5	5P30	5P25	5P20	5P15	5P5	0.2	0.2	0.2	0.5	0.5	0.279
298I - 751	750:5	5P30	5P30	5P25	5P20	5P10	0.2	0.2	0.2	0.2	0.5	0.349
298I - 801	800:5	5P30	5P30	5P25	5P20	5P10	0.2	0.2	0.2	0.2	0.5	0.372

USA, Canada, Asia, Latin America

Tel: +1-800-547-8629

Fax: +1-905-201-2455

e-mail: sales.multilin@ge.com

Europe, Middle East, Africa

Tel: +34-94-485-88-00


Fax: +34-94-485-88-45

e-mail: gemultilin.euro@ge.com

Please refer to our website www.GEMultilin.com for more detailed contact information


CS00A40637 Rev.1 11/10

Models 296I, 297I, 298I, 299I, 300I

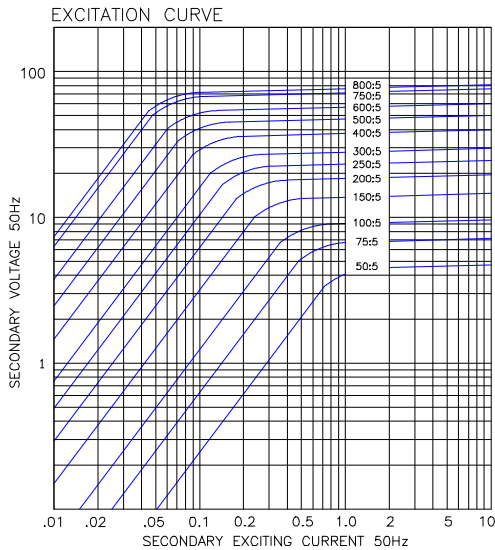

Model 299I Window Diameter 85.9mm
Approximate weight 4.5 kg



Catalog Number	Current Ratio	IEC 60044-1 Protection Class at 50 HZ					IEC 60044-1 Measuring Class at 50 HZ					Secondary Winding Resistance (ohms @ 75 °C)
		Burden VA					Burden VA					
		2.5	5.0	10.0	15.0	30.0	2.5	5.0	10.0	15.0	30.0	
299I - 500	50:5	10P5	-	-	-	-	3.0	-	-	-	-	0.012
299I - 750	75:5	10P5	-	-	-	-	3.0	5.0	-	-	-	0.028
299I - 101	100:5	10P10	10P5	-	-	-	3.0	3.0	5.0	-	-	0.044
299I - 151	150:5	5P10	10P5	10P5	-	-	1.0	3.0	3.0	5.0	-	0.066
299I - 201	200:5	5P10	10P10	10P5	-	-	1.0	3.0	3.0	5.0	5.0	0.088
299I - 251	250:5	5P15	5P10	10P5	10P5	-	1.0	1.0	3.0	3.0	5.0	0.110
299I - 301	300:5	5P15	5P10	5P5	10P5	-	0.5	1.0	1.0	3.0	3.0	0.132
299I - 401	400:5	5P20	5P15	5P10	5P5	-	0.5	0.5	1.0	1.0	3.0	0.177
299I - 501	500:5	5P25	5P20	5P15	5P10	5P5	0.5	0.5	0.5	1.0	1.0	0.221
299I - 601	600:5	5P25	5P20	5P15	5P10	5P5	0.2	0.5	0.5	1.0	1.0	0.265
299I - 751	750:5	5P30	5P25	5P20	5P15	5P10	0.2	0.2	0.5	0.5	0.5	0.331
299I - 801	800:5	5P30	5P25	5P20	5P15	5P10	0.2	0.2	0.2	0.5	0.5	0.353

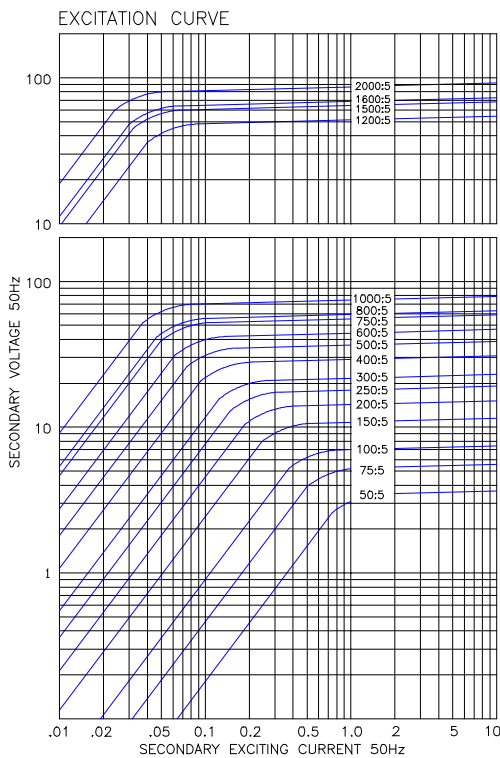

Model 300I Window Diameter 95.3mm
Approximate weight 4.1 kg

Catalog Number	Current Ratio	IEC 60044-1 Protection Class at 50 HZ					IEC 60044-1 Measuring Class at 50 HZ					Secondary Winding Resistance (ohms @ 75 °C)
		Burden VA					Burden VA					
		2.5	5.0	10.0	15.0	30.0	2.5	5.0	10.0	15.0	30.0	
300I - 500	50:5	10P5	-	-	-	-	3.0	-	-	-	-	0.010
300I - 750	75:5	10P5	-	-	-	-	3.0	-	-	-	-	0.015
300I - 101	100:5	10P5	-	-	-	-	3.0	5.0	-	-	-	0.020
300I - 151	150:5	10P10	10P5	-	-	-	3.0	3.0	5.0	-	-	0.063
300I - 201	200:5	5P10	10P5	10P5	-	-	1.0	3.0	3.0	5.0	-	0.084
300I - 251	250:5	5P10	5P10	10P5	-	-	1.0	1.0	3.0	3.0	5.0	0.104
300I - 301	300:5	5P10	5P10	5P5	10P5	-	1.0	1.0	1.0	3.0	5.0	0.125
300I - 401	400:5	5P15	5P10	5P5	5P5	-	0.5	0.5	1.0	1.0	3.0	0.167
300I - 501	500:5	5P15	5P15	5P10	5P5	-	0.5	0.5	0.5	1.0	3.0	0.209
300I - 601	600:5	5P20	5P15	5P10	5P5	5P5	0.2	0.5	0.5	1.0	1.0	0.251
300I - 751	750:5	5P20	5P20	5P15	5P10	5P5	0.2	0.2	0.5	0.5	1.0	0.313
300I - 801	800:5	5P20	5P20	5P15	5P10	5P5	0.2	0.2	0.2	0.5	1.0	0.334
300I - 102	1000:5	5P25	5P20	5P15	5P10	5P5	0.2	0.2	0.2	0.5	0.5	0.418
300I - 122	1200:5	5P15	5P10	5P10	5P5	5P5	0.2	0.2	0.5	0.5	0.5	0.449
300I - 152	1500:5	5P15	5P15	5P10	5P10	5P5	0.2	0.2	0.2	0.5	0.5	0.562
300I - 162	1600:5	5P15	5P15	5P10	5P10	5P5	0.2	0.2	0.2	0.2	0.5	0.599
300I - 202	2000:5	5P15	5P15	5P10	5P10	5P5	0.2	0.2	0.2	0.2	0.2	0.749

Models 296I, 297I, 298I, 299I, 300I

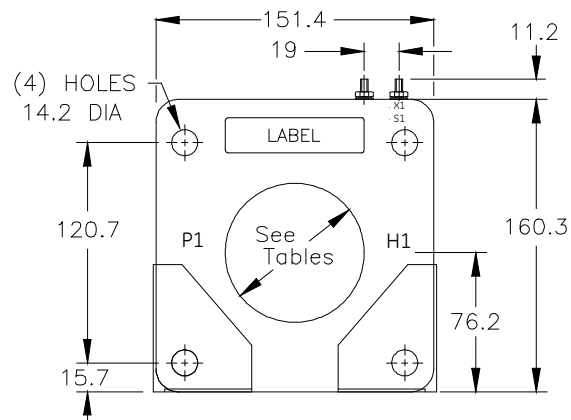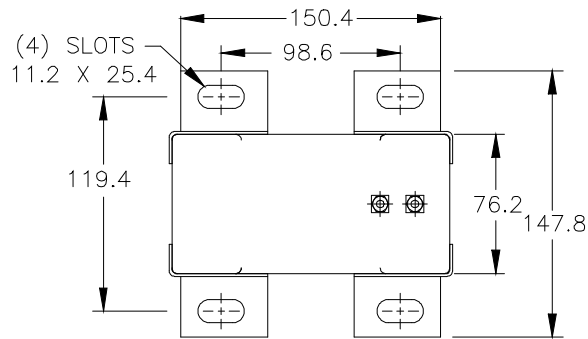

Dimensions in millimeters.

USA, Canada, Asia, Latin America

Tel: +1-800-547-8629

Fax: +1-905-201-2455

e-mail: sales.multilin@ge.com

Europe, Middle East, Africa

Tel: +34-94-485-88-00

Fax: +34-94-485-88-45

e-mail: gemultilin.euro@ge.com

Please refer to our website www.GEMultilin.com for more detailed contact information

CS00A40637 Rev.1 11/10